

goot DUAL HEAT SOLDERING IRONS

Two-stage high-power heater.

QUICK-HEAT SOLDERING IRONS TQ-77/95



SPECIFICATIONS

Model	TQ-77	TQ-95
Voltage	220-240V AC 50/60Hz	
Power Consumption	High 200W / Low 20W (220-240V model)	
Insulation Resistance	Over 100M Ω (500V DC)	
Heater	Ceramic Heater	
Power Cord Length	1.5m	
Length	167mm	210mm
Weight	90g	65g
Accessories	Soldering Iron Tip (TQ-77RT-B)	


*The length does not include the cord bushing. The weight does not include the cord.
NOTE: High power runs while trigger/quick button is pressed.

POWER LAMP (TQ-77 ONLY)
Easy heater-on check

COMFORTABLE SOLDERING
High-power ceramic heater

TWO-STAGE HEAT-SWITCH SYSTEM
10 times higher power than normal

ERGONOMIC GRIP
Prevents fatigue

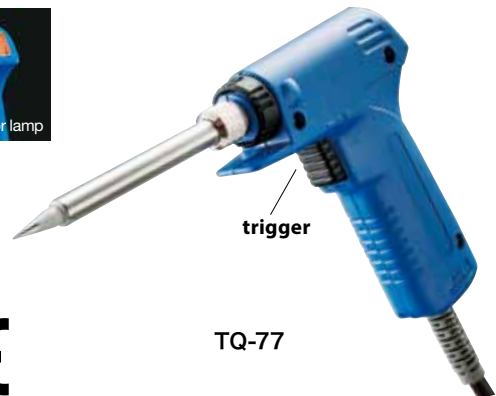

REPLACEMENT TIPS

TQ-77RT-B	TQ-77RT-3C

PARTS / OPTIONS

TQ-77/95 Heater Barrel	TQ-77/95 Heater	TQ-77/95 Spacer
TQ-77HP 220-240V	TQ-77H	TQ-77SS
TQ-77/95 Collar	Recommended Stand	
TQ-77NUT	RD-7303N	

goot NICHROME HEATER SOLDERING IRONS

New ergonomic design.

GENERAL ELECTRONICS SOLDERING IRONS

KX Series

RED TIP
Long-life tips

ERGONOMIC HANDLE
Reduces fatigue



KX series

Model	KX-40R	KX-100R
Voltage	240V AC 50Hz	
Power Consumption	40W	100W
Heater	Nichrome Heater	
Length	208mm	243mm
Weight	50g	80g
Accessories	Soldering Iron Tip	
	R-48B	RD-68BC

*The length does not include the cord bushing. The weight does not include the cord.

REPLACEMENT PARTS / OPTIONS

KS-40R/KX-40R Heater	KS-100R/KX-100R Heater
KS-40H	KS-100H
Recommended Stand	
RD-7303N	

REPLACEMENT TIPS

R-48B	RD-68BC